



# V/STA







## VISTA FLOOR GUIDED

Continuous wall interconnected by hidden hinges, with its weight suspended and guided by the floor track.



## VISTA SLIDING DOOR

Sliding door with light and thin structure. Great solution for small spaces.



## VISTA OPERABLE WALL

Suspended independent twin suspension, without floor track. Manual floor lock/latch system.



## VISTA PIVOTING WALL


Suspended independent twin suspension, without floor track. Manual floor lock/latch system.





# VISTA FLOOR GUIDED

Characterized by their lightness and fine structure, VISTA FLOOR GUIDED panels are guided by two rails (floor & ceiling) when opening and closing the wall. All the panels are interconnected and have only 1 pivot that slides through the upper rail.

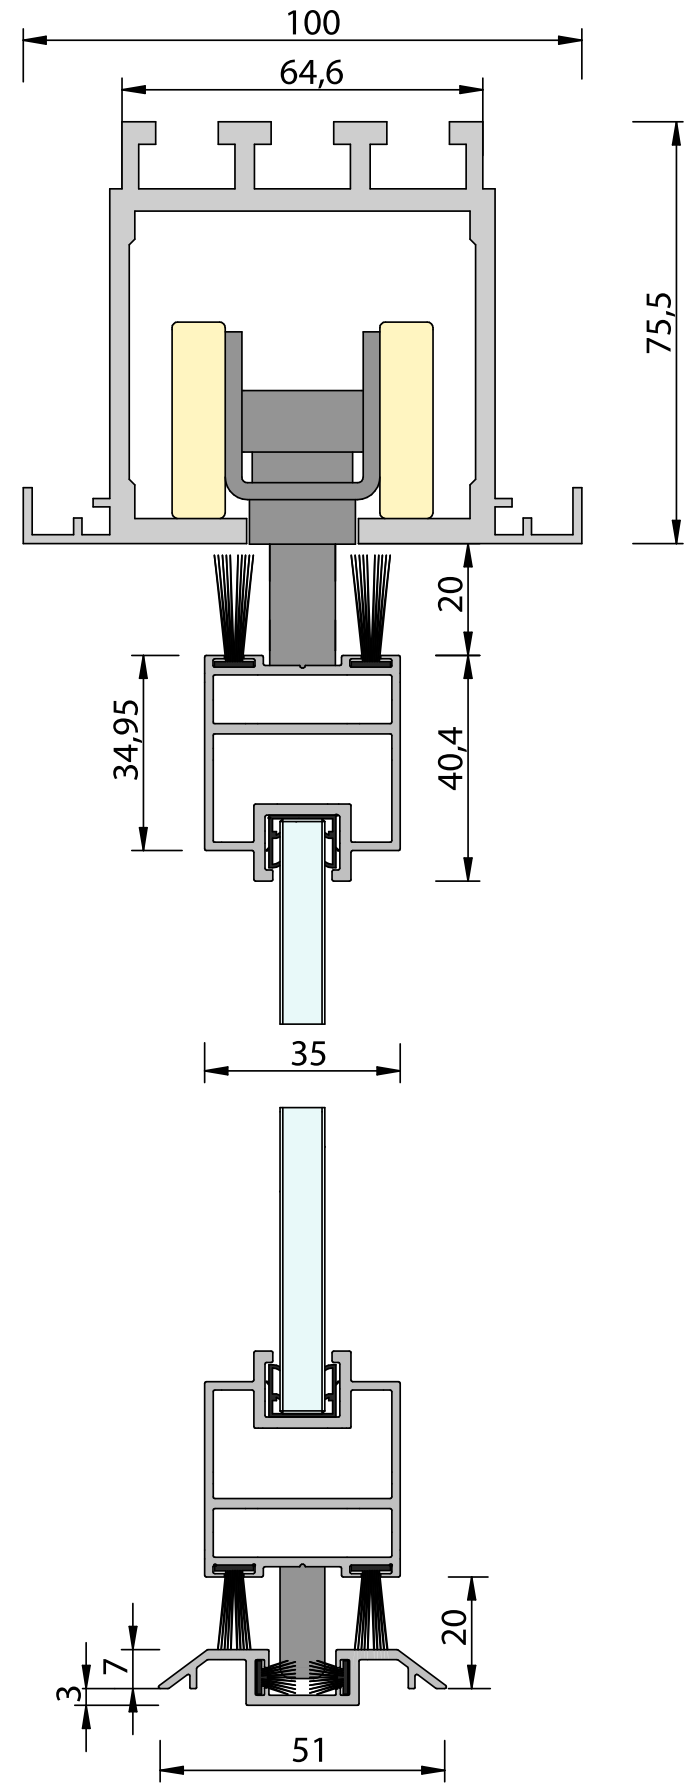

## Technical Information

Dimensions	
Thickness (mm)	35
Height (mm)	40

Construction	
Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles

Operation	
Manual	

Acoustic Rating dB (RW)	≈ 35
Density kg/m²	25 (8mm) - 30 (10mm)
Maximum Wall Height (mm)	3000
Maximum Panel Width (mm)	500-1200
Panel Construction / Frame	Aluminum
Maximum Opening Width	Adjustable

Key-Points	
Suspended weight by the pivot and guided by the lower rail	
Floor locking system	
Port included in the system	
Hidden hinges	






# VISTA

## OPERABLE WALL

VISTA OPERABLE WALL is characterized by having independent panels with twin suspension. With no floor track, the panels are oriented by the upper rail. For open and closing the wall, there is also a manual latch system by panel which only requires a small “cup” on the floor. The lightness and fine structure, eases its mobility.

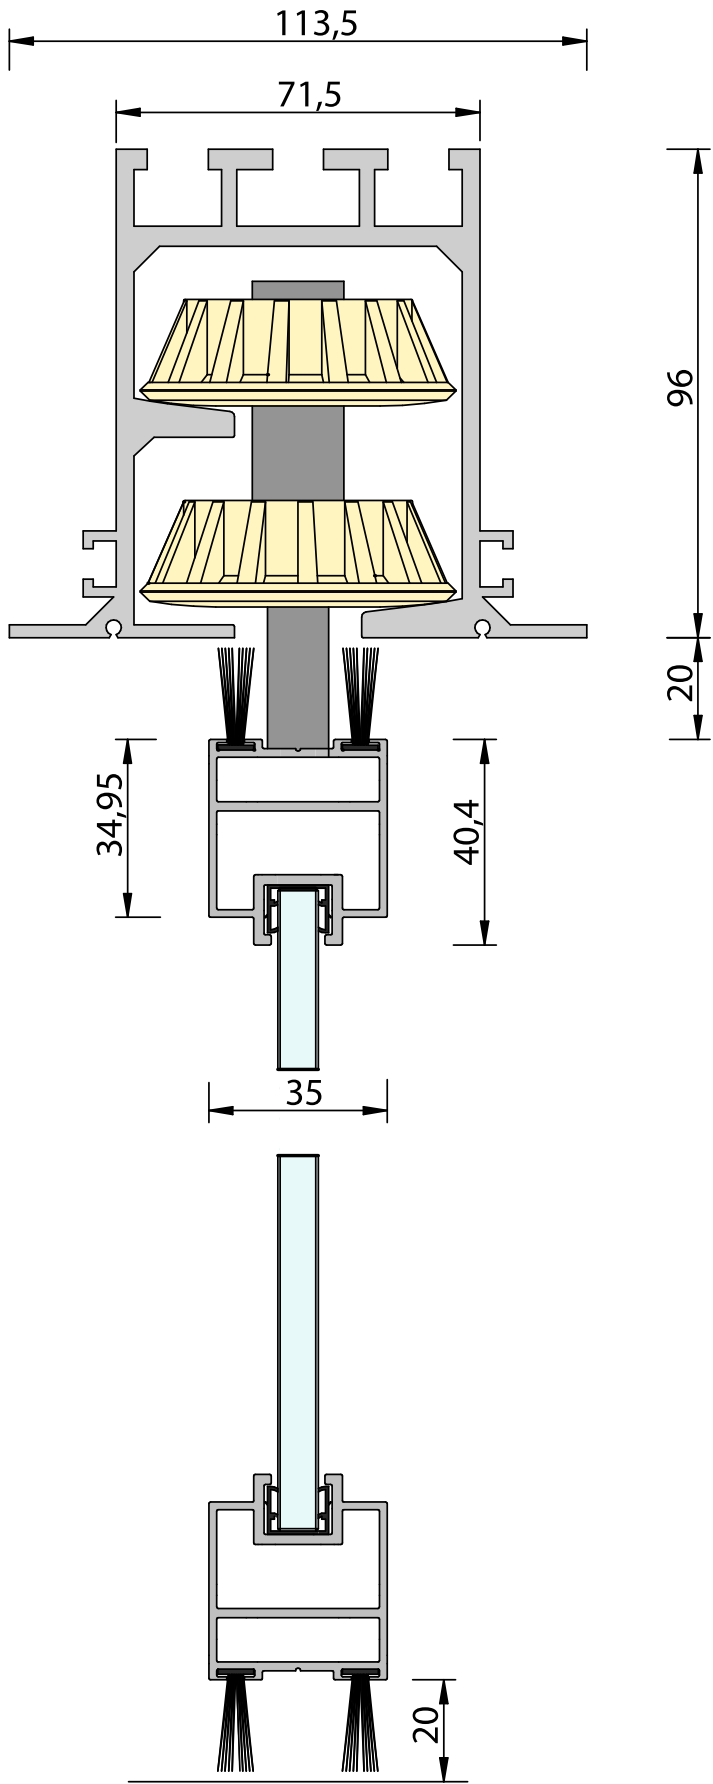

## Technical Information

### Dimensions

Thickness (mm)	35
Height (mm)	40

### Construction

Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles

### Operation

Manual
--------

Acoustic Rating dB (RW)	≈ 35
Density kg/m²	25 (8mm) - 30 (10mm)
Maximum Wall Height (mm)	3000
Maximum Panel Width (mm)	500-1200
Panel Construction / Frame	Aluminum
Maximum Opening Width	Adjustable

### Key-Points

Independent panels can form different layouts and stacking types
Floor locking system
Quick opening
Port included in the system
Hidden hinges






# VISTA

## SLIDING DOOR

VISTA SLIDING DOOR comes with all the benefits of moveable wall panels, but incorporated in a door. Great aesthetic and functional solution for greater privacy

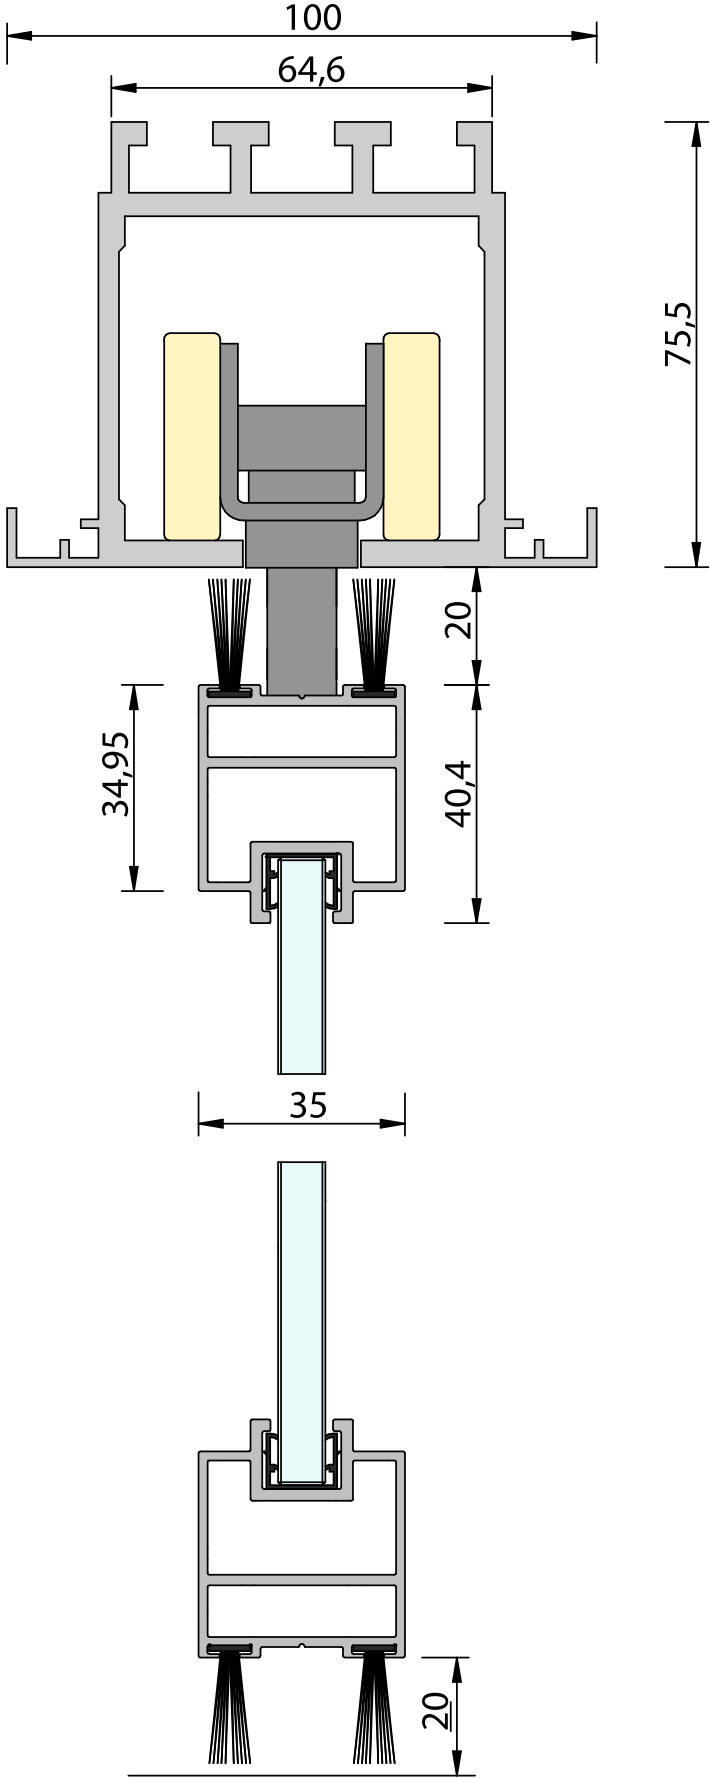

# Technical Information

## Dimensions

Thickness (mm)	35
Height (mm)	40

## Construction

Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles

## Operation

Manual
--------

Acoustic Rating dB (RW)	≈ 35
Density kg/m²	25 (8mm) - 30 (10mm)
Maximum Wall Height (mm)	3000
Maximum Panel Width (mm)	500-1200
Panel Construction / Frame	Aluminum
Maximum Opening Width	Adjustable

## Key-Points

- Sliding door with reduced thickness
- Weight supported by the bottom rail
- High aesthetic level






# VISTA

## PIVOTING WALL

VISTA PIVOTING WALL is characterized by having 1 pivot independent panels, thus allowing greater adaptability to the space when opened. The panels are oriented and supported by the upper rail, with no need for a floor track. They also have a manual panel latch system in which only a small “cup” on the floor is required.

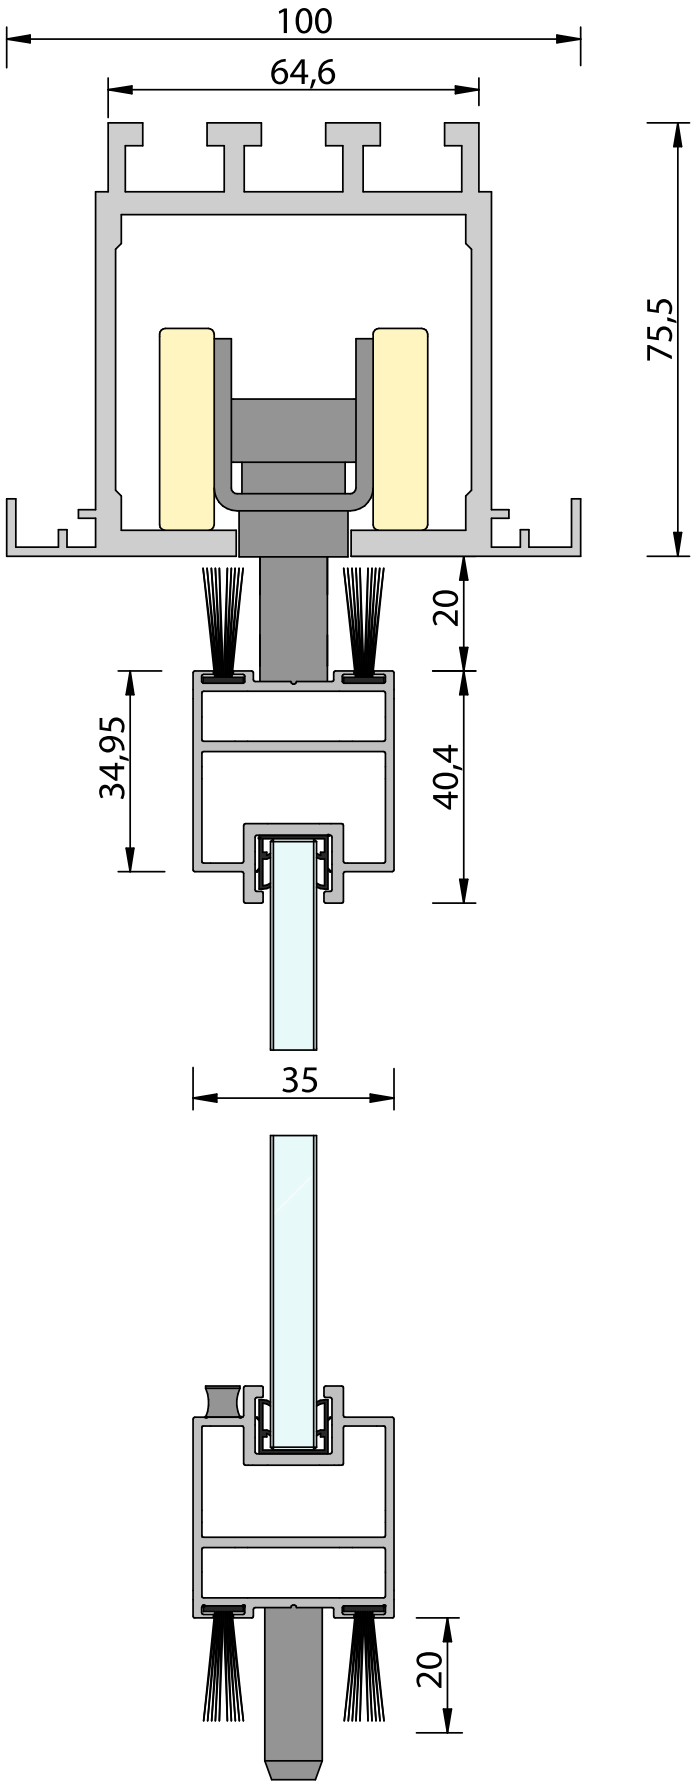

## Technical Information

Dimensions	
Thickness (mm)	35
Height (mm)	40

Construction	
Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles

Operation	
Manual	

Acoustic Rating dB (RW)	≈ 35
Density kg/m²	25 (8mm) - 30 (10mm)
Maximum Wall Height (mm)	3000
Maximum Panel Width (mm)	500-1200
Panel Construction / Frame	Aluminum
Maximum Opening Width	Adjustable


Key-Points	
Independent panels	
Panels can stack in the corner	
Centre folding or side folding	
Pivoting wall with reduced thickness	
High aesthetic level	



# Stacking Systems


## VISTA - Floor Guided

Celling Track	Monodirectional
Floor Track	Yes

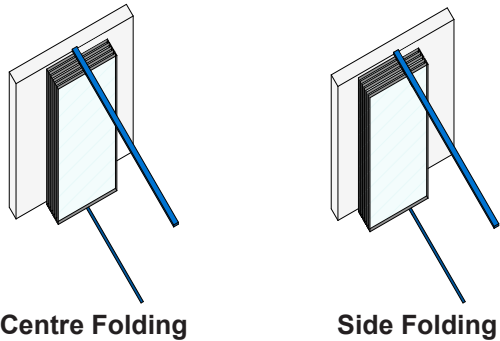


## VISTA - Operable Wall

Celling Track	Multidirectional
Floor Track	No

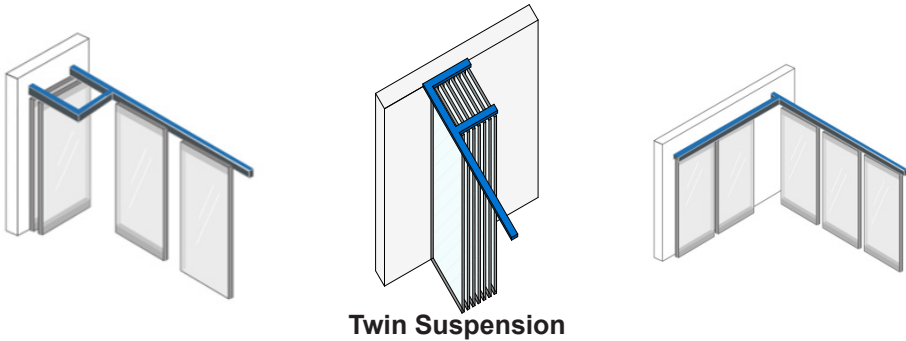


## VISTA - Sliding Door

Celling Track	Monodirectional
Floor Track	No



## VISTA - Pivoting Wall

Celling Track	Monodirectional
Floor Track	No

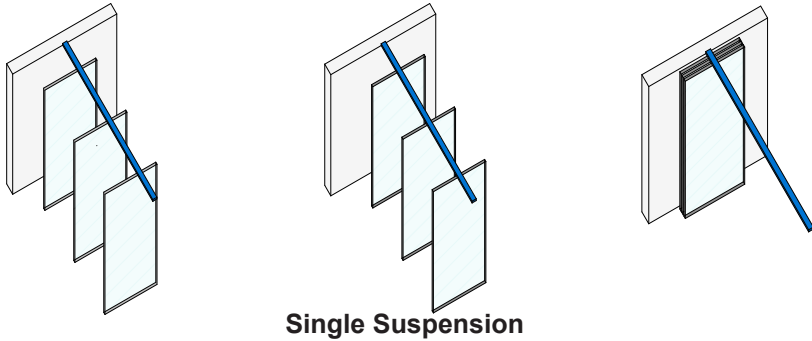

# Technical Details



Vista Door

VISTA walls may include a single / double door or, ultimately, a hinged door. The single door is the closure of a continuity of the system and can be double if two walls are in the middle, adding the possibility of having a fixed door on the opposite side of the system starting.



Hidden Hinges

VISTA hinges are hidden. Thus, when the wall is closed, there is no element that contradicts the continuity of the wall. It is one of the highlighted aesthetic points in the development of the wall.



Floor Track

The floor track facilitates the opening and closing of the partition. It is a discreet piece and prepared to be adapted to the floor, with or without finishing.




Floor Locking System


VISTA wall can work suspended on a rail fixed to the ceiling, running free at the bottom with no need for floor guidance. To open and close the partition, a discreet manual locking system was created.

# Finishes

Wood Lacquering



NATURAL NEBRASKA OAK



NATURAL DIJON WALNUT

Glass




(8 or 10 mm)







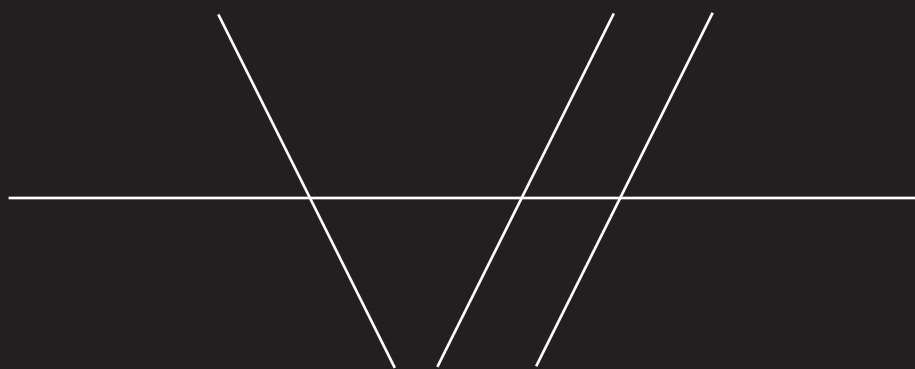

JENSZ

+31 183 500076

[www.jensz.nl](http://www.jensz.nl)  
[info@jensz.nl](mailto:info@jensz.nl)

Jensz BV  
Veenweidweg 29  
2957 LD  
Nieuw-Lekkerland  
Nederland